

IPC-7132

Cost effective Wallmount Chassis for ATX/mATX Motherboard



Features


- Support ATX/mATX/M/B
- Shockproof drive bay for one 5.25" ODD and three 3.5" HDDs
- Thumb-screw for top cover easy opening
- Bidirectional option to mount chassis on wall or workbench
- Two front access USB ports

CE FCC


Specifications

Disk Drive Bay	3.5" 5.25"	External 1 1	Internal 2 -
Cooling	Fan Air Filters	1 (12cm/85CFM) Yes	
Front/IO interface	USB 2.0	2	
Miscellaneous	LED Indicators Control Rear panel	Power, HDD Power Switch, System Reset Button 4x USB, 2x DB-9, 1x LPT port	
Environment	Temperature	Operating 0~40°C (32~104°F)	Non-operating -20~60°C (-4~140°F)
	Humidity	10~85% @ 40°C, non-condensing	10~95% @ 40°C, non-condensing
	Vibration (5-500Hz)	1Grms	2G
	Shock	10G (with 11ms duration, half sine wave)	
Physical Characteristics	Dimensions (WxHxD)	200x330x430mm (7.9"x13"x16.9")	
	Weight	9.96kg (21.93lb)	


Front View

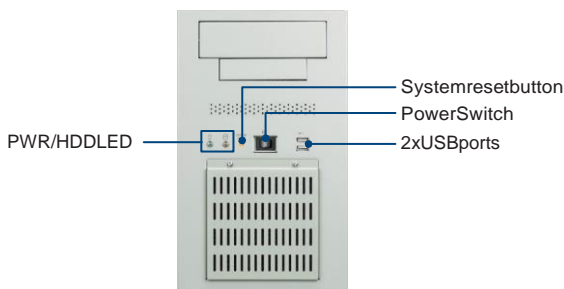

Rear View

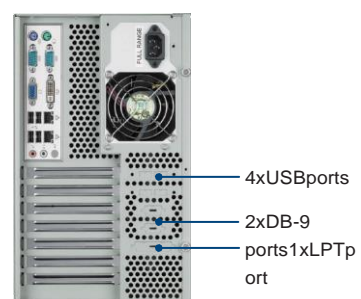


Inside View

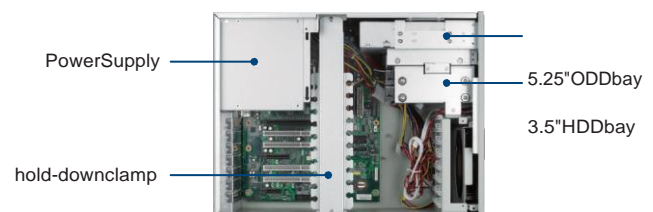


Dimensions

Unit:mm[inch]

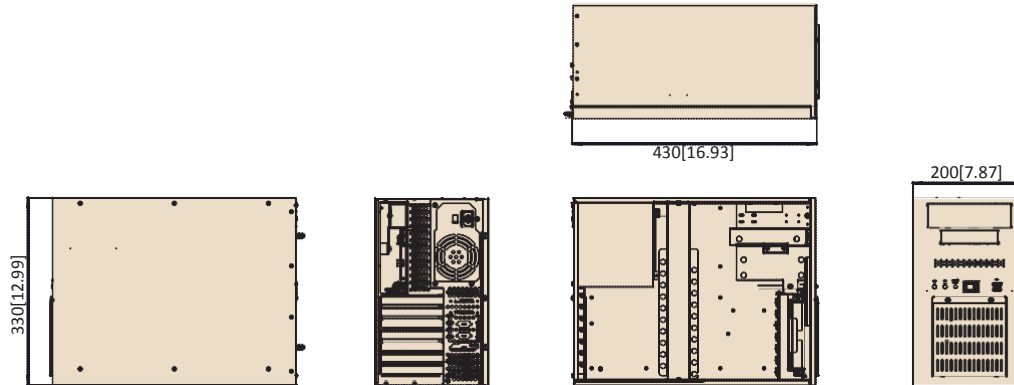

Installation

Unit:mm[inch]

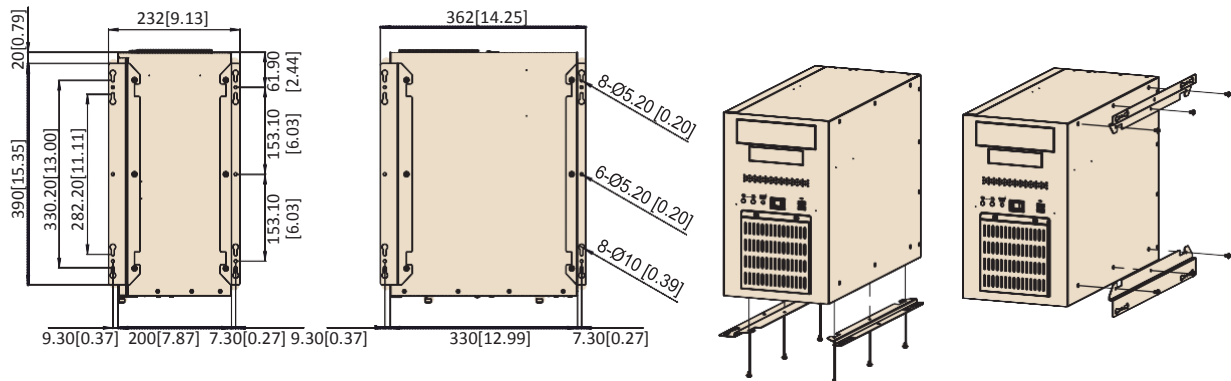

Ordering Information

Optional Accessories

ModelName	PowerSupply	Wattage	SwitchType	PartNumber	Description
IPC-7132MB-00XE	-	-	ATX	IPC-DT-3120E	MobileHDDtrayfordual2.5"SATAHDDs
IPC-7132MB-25ZE	PS8-250ATX-ZE	250W	ATX	1750006427	87.87CFM,systemfan120x120x25.0mm
IPC-7132MB-30ZE	PS8-300ATX-ZBE	300W	ATX		
IPC-7132MB-40ZE	PS8-400ATX-ZE	400W	ATX		