

# UNO-1372G

Intel® Atom™ Quad-Core Small Size Control DIN-rail PC w/3x GbE, built-in 4GB DDR3L, 2x mPCIe, 1mSATA, 2x COM, 8x DI/O, 3x USB, HDMI, VGA

**NEW**



## Features

- Intel® Atom E3845 1.91GHz processor with 4GB DDR3L Memory
- 3x GbE, 3x USB, 2x COM, 1x VGA, 1x HDMI, Audio, iDoor, mSATA, 2x mPCIe, 1x SATA, 4x DI, 4x DO, 1x Power Terminal
- Compact with Fanless Design
- Dual Power Input for avoiding Power Down Time
- Exchangeable RTC Battery with easy Access on the Top
- Digital I/O with Isolation Protection for Sensing and controlling
- Diverse system IO and Supports Fieldbus Protocol by iDoor Technology as a Protocol Gateway
- 3G/GPS/GPRS/Wi-Fi Communication by iDoor Technology as a Communication Gateway
- Supports MRAM by iDoor Technology
- LAN Redundancy (Teaming)

## Introduction

The UNO-1372G is an Intel Atom Quad-Core DIN-rail controller. This controller features dual power inputs that shorten the down time to enhance operation excellence. The general purpose input/output ports also help machine builders integrate direct control of start/stop inspection and indicate inspection results. The UNO-1372G is also equipped with Advantech iDoor technology that uses iDoor modules to extend this product to become a gateway controller, such as a PoE card, or isolation serial port card. The UNO-1372G also features 3 gigabyte LAN ports, 1 USB 3.0 port, 2 COM ports and HDMI& VGA display ports for essential upstream and downstream links, for example, PoE connected to IP camera from iDoor.

## Specifications

### General

- Certification CE, FCC, UL, CCC, BSMI
- ③ Dimensions (W x D x H) 85 x 139 x 152 mm (3.3" x 5.5" x 6.0")
- Form Factor Small Size
- Enclosure Aluminum Housing
- Mounting DIN-rail, Wallmount
- Weight (Net) 1.6kg (3.5lbs)
- Power Requirement 9~36V<sub>dc</sub> (Recommend 12/24 V<sub>dc</sub>)
- Power Consumption 24W (Typical), 50W (Max)
- OS Support Microsoft® Windows 7/8/10, WES7, AdvLinux

### System Hardware

- BIOS AMI UEFI 128Mbit Flash BIOS
- Watchdog Timer Programmable 255 levels timer interval, from 1 to 255 sec
- Processor Intel Atom E3845 1.91GHz, 2MB L2 Cache
- System Chip Integrated Intel SoC Chipset
- Memory Built-in 4GB DDR3L 1333 MHz (Up to 8GB)
- Graphics Engine Intel® HD Graphics
- Ethernet LAN A, B: Intel® i210-IT GbE, 802.1Qav, 802.1AS, 802.3az  
LAN C: Realtek RTL8111E GbE
- LED Indicators LEDs for Power, battery, LAN (Active, Status), COM (Tx/Rx), HDD and programmer LED
- Storage 1x mSATA
- Expansion One drive bay for SATA 2.5" HDD (Compatible with 9.5mm height HDD)
- Expansion 2x Full-size mPCIe slot

### I/O Interfaces


- Serial Ports 1 x RS-232, DB9, 50~115.2kbps  
1 x RS-422/485, DB9, auto flow control, 50~115.2kbps
- LAN Ports 3 x RJ45, 10/100/1000 Mbps IEEE 802.3u 1000Base-T Fast Ethernet
- USB Ports 3 x USB Ports (2 x USB 2.0, 1 x USB 3.0)
- Isolated DIO 4-ch digital input, 4-ch digital output (2500 V<sub>dc</sub>)
- Displays 1 x VGA, supports 1920 x 1080 @ 60Hz 24bpp  
1 x HDMI 1.4a, supports 1920 x 1080 @ 60Hz 24bpp
- Audio Line-Out
- Power Connector 1 x 4 Pins, Terminal Block to support dual power input

### Environment


- Operating Temperature -20 ~ 60°C (-4 ~ 140°F) @ 5 ~ 85% RH with 0.7m/s airflow (Industry SSD)
- Storage Temperature -40 ~ 85°C (-40 ~ 185°F)
- Relative Humidity 95% RH @ 40°C, non-condensing
- Shock Protection Operating, IEC 60068-2-27, 50G, halfsine, 11ms
- Vibration Protection Operating, IEC 60068-2-64, 5Grms, random, 5 ~ 500Hz, 1 hr/axis
- Ingress Protection IP40

## Installation Scenario

### DIN-rail mounting illustration

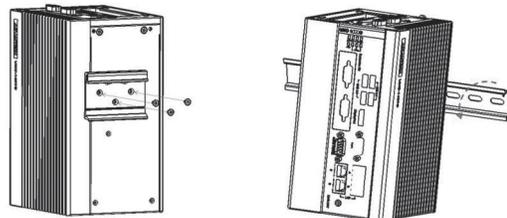


### Wall mounting illustration

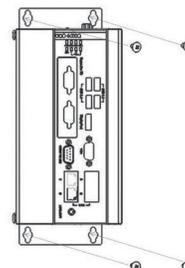


## Dimensions


Unit: mm

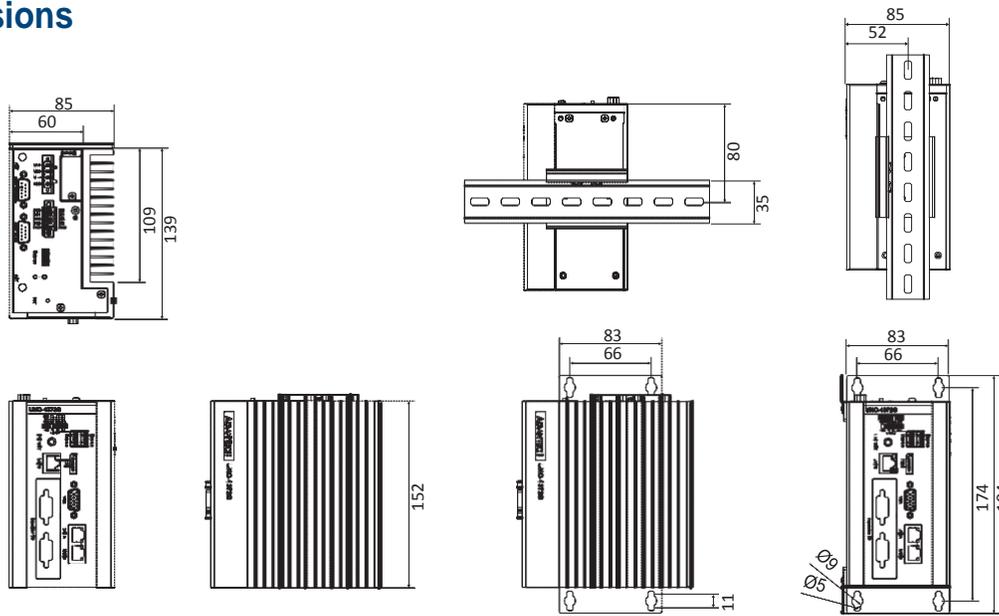

## Front I/O View

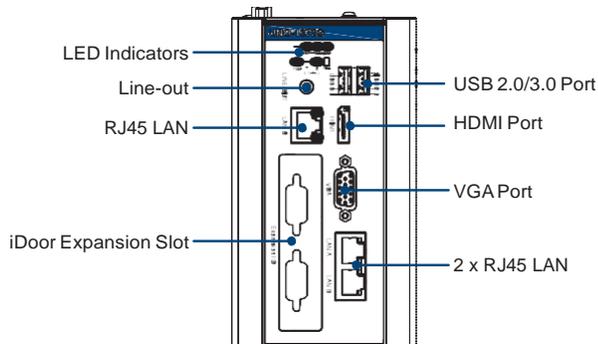

## Top I/O View

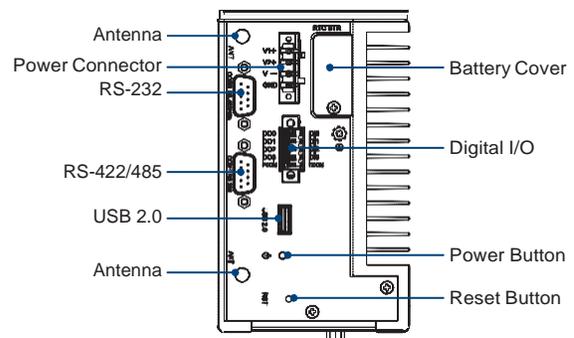

## Ordering Information

- **UNO-1372G-E3AE** Intel Atom Quad-Core 1.91GHz, 4GB, 3 x LAN, 2 mPCIe, iDoor

## iDoor Modules

- **PCM-23C1CF-BE** 1 CFast Slot with Cover Protection
- **PCM-23U1DG-BE** USB Slot w/ Lock for USB Dongle
- **PCM-24R2GL-AE** 2-Port Gigabit Ethernet, mPCIe, RJ45
- **PCM-24U2U3-AE** 2-Port USB 3.0, mPCIe, USB-A type
- **PCM-24D2R4-BE** 2-Port Isolated RS-422/485 mPCIe, DB9
- **PCM-24D4R4-BE** 4-Port Non-Isolated RS-422/485 mPCIe, DB37
- **PCM-24S2WF-BE** WiFi 802.11 ac/a/b/g/n 2T2R w/Bluetooth 4.1
- **PCM-24S33G-AE** Wide-Temp 3.75G HSPA and GPS, 2-in-1, Full-size mPCIe w/ Redundant SIM Card holder, 2-port SMA
- **PCM-26R2PN-MAE** 2-Port HilschernetX100 FieldBus mPCIe, PROFINET, RJ45, Master
- **PCM-26R2PN-SAE** 2-Port HilschernetX100 FieldBus mPCIe, PROFINET, RJ45, Slave
- **PCM-26D1DB-MAE** 1-Port HilschernetX100 FieldBus mPCIe, PROFIBUS, DB9, Master
- **PCM-26D1DB-SAE** 1-Port HilschernetX100 FieldBus mPCIe, PROFIBUS, DB9, Slave

## Optional Accessories

- **PWR-247-CE** ADP A/D 100-240V 60W 24V (Commercial Grade)
- **1702002600** Power Cable US Plug 1.8 M (Industrial Grade)
- **1702002605** Power Cable EU Plug 1.8 M (Industrial Grade)
- **1702031801** Power Cable UK Plug 1.8 M (Industrial Grade)
- **1700000596** Power Cable China/Australia Plug 1.8 M (Industrial Grade)

## Embedded O/S

- **2070014956** Image Win10 Enterprise 2016 LTSP X64 MUI for UNO-1372G
- **2070014549** Image AdvLinuxTU for UNO-1372G
- **2070014098** Image WEC7 MUI for UNO-1372G
- ③ **20703WE7PS0010** Img WS7P X64 MUI V4.18 B024 for UNO-1372G
- ③ **20703WE7PS0011** Img WS7P X86 MUI V4.18 B021 for UNO-1372G